

COLOUR PALETTE

gleaming
metallic



Precious Metals mouldings (also available in Graphite)



NB9912
Gold Cable moulding
8" x 1" (200 x 25mm)



NA8904
Gold Delta moulding
8" x 1/2" (200 x 12mm)



NA9918
Gold Braid moulding
8" x 5/8" (200 x 16mm)




NA5919
Gold Rail moulding
8" x 1 1/4" (200 x 30mm)

Precious Metals field tiles 4" x 4" (100 x 100mm)



NE5900
Bronze

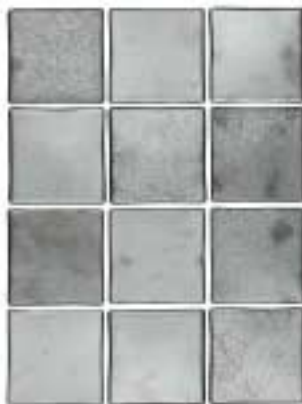

NN5900
Graphite



NA5900
Gold

COLOUR PALETTE

Precious Metals decorative tiles 4" x 4" (100 x 100mm)



NB9923
Hydrus



NB9925
Lupus



NG9924
Orion



NG9926
Sirius



NB9929
Pegasus



NB9928
Jupiter



NG9927
Aquila



NG9930
Aurora



Gemstones collection

Precious metal frame tiles 4" x 4" (100 x 100mm)



NB5931
Gold
Brilliant Cut



NB5932
Gold
Caboche Cut



NB5930
Gold
Square Cut



NM5931
Graphite
Brilliant Cut



NM5932
Graphite
Caboche Cut



NM5930
Graphite
Square Cut

Precious metal gemstones



NB5934, 5935, 5933

Gold
Facet, Solitaire, Diamond



NM5934, 5935, 5933

Graphite
Facet, Solitaire, Diamond



COLOUR PALETTE

USEFUL INFORMATION

Dimensions

Nominal dimensions for all Original Style tiles shown in this brochure are given in the introduction to each range. Owing to their deliberately rustic character, actual dimensions will vary from these figures.

With respect to 4" x 4" (100 x 100mm) tiles, however, you will need 81 tiles per square yard or 100 tiles per square metre plus a 5% allowance for wastage.

Technical Specification

Original Style tiles conform to BS 6431 Part 9 – the specification for tiles with a water absorption of E>10% (Group B3).

Shading

The distinctive yet subtle variations in shade within each tile and between individual pieces give a wonderful impression of depth to tiled areas. It is important, therefore, to spend some time to achieve the most pleasing distribution of shades before fixing.

Installation

Detailed installation methods for internal applications are specified in BS5385 Part 1 and ANSI A108.

Original Style wall tiles are not recommended for exterior use.

For detailed advice on the particular adhesives to use in a variety of circumstances, please ask your supplier for the Original Style leaflet Ceramic Wall Tiles – Fixing and Cleaning Instructions (applicable in the United Kingdom only).

In the USA please follow the recommendations of a reputable adhesive manufacturer and always comply with American National Standards Institution (ANSI) specifications as set out in the Handbook for Ceramic Tile Installation published by the Tile Council of America.

Grouting

In all installations, seal joints with an impervious grout such as BAL SupergROUT.

If joints are not completely watertight, moisture can be absorbed into the tile body causing stains to show through the glaze.

Use an average grout space of at least 3mm to allow for the variations in tile dimensions.

Cleaning

Wash down tiled surfaces with either clean water or a neutral (i.e. not acidic or alkaline) detergent. Dry off and polish with a dry duster.

Special Warning – Laurel (Dark Green) Gloss Glazed Tiles and Graphite Glazed Tiles

Laurel (Dark Green) Gloss Glazed Tiles (pages 9–10) and Graphite Glazed Tiles (pages 13–14) have a copper-based glaze which is prone to discolouration by very mild acids often found in the home, for example lemon scented soaps. To minimise this, wash with clean water only and immediately wipe dry. These tiles are recommended for use in dry areas only.

Crazing

Highly glazed ceramic tiles may craze with time, and no guarantee can be given against this occurring.

Use of tiles on counter top surfaces

Snowdrop, Clematis and Camellia gloss glazed field tiles are manufactured with a harder glaze than others. Accordingly, these are the only tiles suitable for use on counter top surfaces.

Do not forget, however, that if using these tiles on kitchen work surfaces, knives and other implements can still scratch the glaze so Original Style recommend the use of a chopping board or toughened glass surface protector when preparing food or carrying out similar tasks.

Additionally, it is important to fix the tiles with both an adhesive and grout that are impervious to water and easy to clean. For example, either BAL Grip or BAL Flex would be acceptable adhesives with an epoxy grout such as BAL EasyPOXY Grout.

Photography

Owing to variations in studio lighting and printing inks, the tile colours shown in this brochure may differ slightly from those of the actual tiles. Before making your choice it is always advisable to ask your Original Style supplier to show you a sample.

Limits of Liability

Original Style accepts no liability for the faulty installation of its tiles. In the case of any claim relating to the tiles themselves Original Style's liability is limited to the purchase of the product and does not extend to consequential loss. Claims cannot be considered after the tiles have been installed.

Original Style warrants that its tiles conform to their description and are fit for their purpose. The company makes no other express or implied warranty as to fitness or merchantability. We extend no guarantees, express or implied, as to wear resistance or maintenance procedures.